

STONE & RENDER

Ultimate protection against water, oil & stains

PRODUCT DESCRIPTION

- Stone & Render Protection prevents ingress of most types of surface contamination, including water, oil and graffiti to porous wall and roof building substrates.
- Reduces surface degradation as atmospheric contaminants no longer stick to the surface.
- A treated surface will remain moisture vapour permeable.
- Does not change the appearance of the treated surface but makes it easier to clean.
- A treated surface will remain moisture and vapour permeable.
- Suitable for colour rendered surfaces which have had algae growth.
- Prevents surfaces from deteriorating through repeated "Freeze/Thaw" cycles.
- UV resistant. Non Flammable. Non toxic. Environmentally Friendly.
- Independent tests prove that a vertical surface treated with Stone & Render improves thermal insulation value by 7% (it removes the cold wall syndrome associated with water saturated walls).

APPLICATION

Always carry out a test area first to ensure the finished result is acceptable.


- Ensure surface is clean, dry and dust free, remove any stains or efflorescence.
- Shake container well before use. Do not dilute and do not mix with another product.
- Apply using a low pressure sprayer, roller or brush. T
- he surface should be impregnated to saturation point, recommend two to three applications 'wet-on-wet'.
- Remove excess product before drying. Allow up to 4 hours drying time.
- Clean tools and equipment with soapy water immediately after use.

RECOMMENDATIONS

- Do not apply if rain is expected within 4 hours. Do not apply during rain or frost and when surface air temperature is <5°C and >30°C.
- Keep in dry place between 5°C and 30°C in the original container.

KEY FEATURES

- Vertical sealer
- Breathable formula
- Prevents ingress of oil, water, dirt, moisture & graffiti
- Reduces surface degradation
- Ideal for render, stone, plaster, porous wall & roof substrates

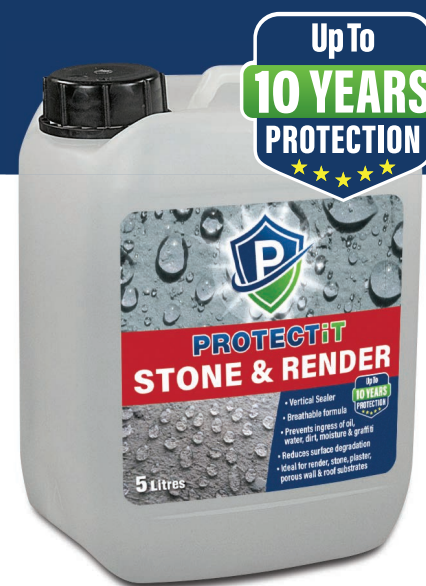

TECHNICAL DATA

- **Chemical Composition:** Aqueous fluoropolymer dispersion.
- **Density:** 1.0kg / lt @ 25°C
- **Chemical Resistance:** Mild acids and alkalis, water and de-icing salts.
- **Coverage:** Dependant on porosity
- **VOC Content:** 0.0g / litre

Shelf Life & Storage: 24 months from the date of manufacture in the original unopened container. Store locked up in dry place between 5°C and 30°C in the original container.

For Health & Safety instructions, first aid measures, spillages and disposal instructions, see separate Health & Safety Data Sheet (MSDS)

Important: The content of this documentation is based on our experience of the product. PROTECTiT SP guarantees the quality of its products, but expressly declines any liability in the event of failure by the user to comply with the recommendations and conditions of use of said products, notably but not exclusively in the event of incorrect application, application by unqualified personnel, use of products not compatible with PROTECTiT SP products or bad weather conditions.